



Deep groove ball bearing

Double row-4204-B-TVH

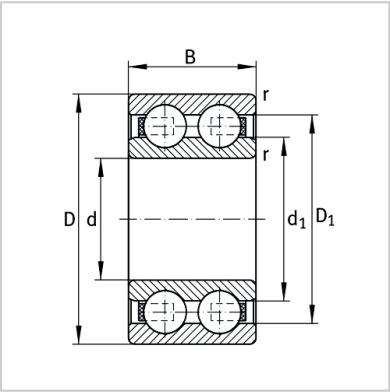

Double row

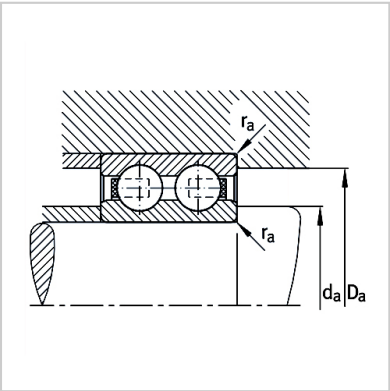

Installation dimension:

|                               |            |
|-------------------------------|------------|
| model :                       | 4204-B-TVH |
| Mass (m ≈ kg) :               | 0.143      |
| Dimensions (mm) :             |            |
| d :                           | 20         |
| D :                           | 47         |
| B :                           | 18         |
| rmin :                        | 1          |
| D1 ≈ :                        | 39.5       |
| d1 ≈ :                        | 30.2       |
| Installation dimension (mm) : |            |
| da min :                      | 25.6       |
| Da max :                      | 41.4       |
| ra max :                      | 1          |
| Basic rated load (n) :        |            |
| Dynamic load Cr :             | 18000      |
| Static load Cor :             | 12700      |
| Fatigue limit load Cur / n :  | 690        |
| Limit speed ng / min – 1 :    | 14000      |