



Self-aligning ball bearing


Cylindrical hole or conical hole (open or sealed)- 1204-K-TVH-C3

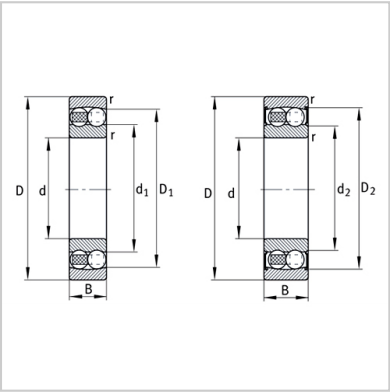

Cylindrical hole, cylindrical hole seal 2RS

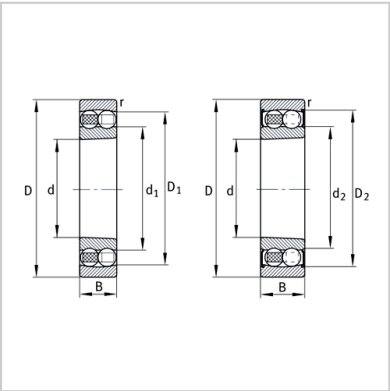

Conical hole, conical hole seal 2RS

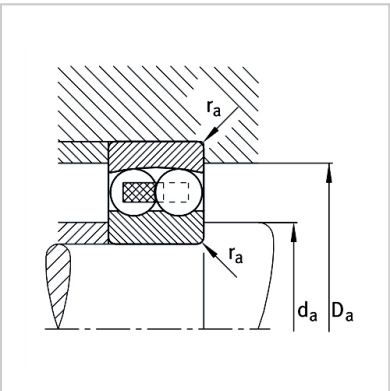

Installation dimension:

model :	1204-K-TVH-C3
Mass (m ≈ kg) :	0.116
Dimensions (mm) :	
d :	20
D :	47
B :	14
rmin :	1
D ₁ ≈ :	38.1
D ₂ ≈ :	-
d ₁ ≈ :	29.2
d ₂ ≈ :	-
Installation dimension (mm) :	
d _a min :	25.6
D _a max :	41.4
r _a max :	1
Basic rated load (n) :	
Dynamic load C _r :	10100
Static load C _{or} :	2600
Calculation coefficient :	
e :	0.28
Y ₁ :	2.24
Y ₂ :	3.46
Y ₀ :	2.34
Fatigue limit load Cur / n :	161
Limit speed ng / min – 1 :	18000
Reference speed nB / min – 1 :	20700

: