



Self-aligning ball bearing


Cylindrical hole or conical hole (open or sealed)-2205-K-2RS-TVH-C3

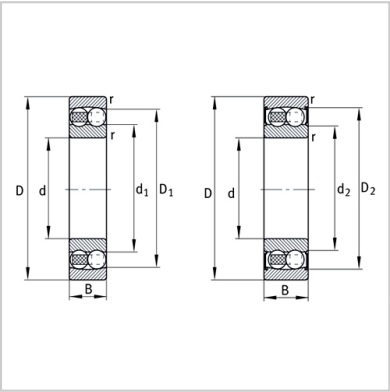

Cylindrical hole, cylindrical hole seal 2RS

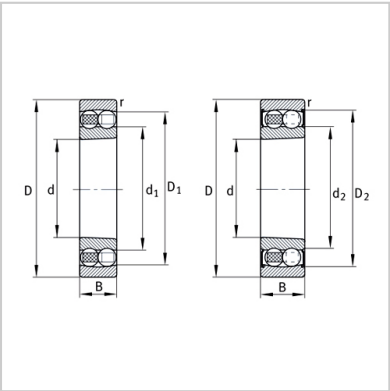

Conical hole, conical hole seal 2RS

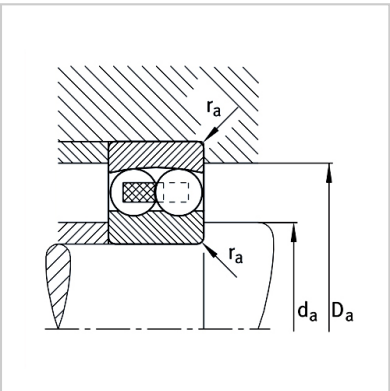

Installation dimension:

model :	2205-K-2RS-TVH-C3
Mass (m ≈ kg) :	0.157
Dimensions (mm) :	
d :	25
D :	52
B :	18
rmin :	1
D ₁ ≈ :	-
D ₂ ≈ :	46.3
d ₁ ≈ :	-
d ₂ ≈ :	30.7
Installation dimension (mm) :	
d _a min :	30.6
D _a max :	46.4
r _a max :	1
Basic rated load (n) :	
Dynamic load C _r :	12300
Static load C _{or} :	3250
Calculation coefficient :	
e :	0.27
Y ₁ :	2.37
Y ₂ :	3.66
Y ₀ :	2.48
Fatigue limit load Cur / n :	203
Limit speed ng / min – 1 :	9500
Reference speed nB / min – 1 :	-

: