



Self-aligning ball bearing


Cylindrical hole or conical hole (open or sealed)-1304-TVH

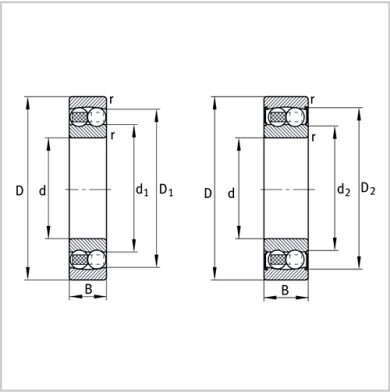

Cylindrical hole, cylindrical hole seal 2RS

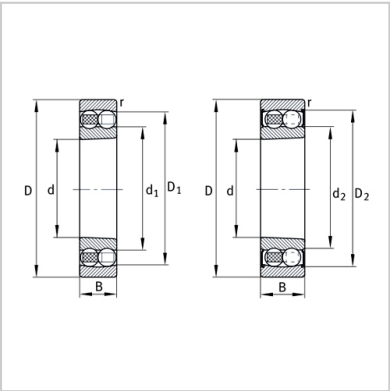

Conical hole, conical hole seal 2RS

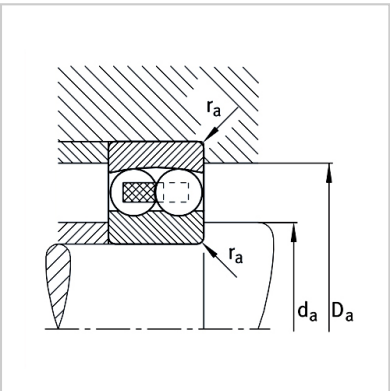

Installation dimension:

model :	1304-TVH
Mass (m ≈ kg) :	0.163
Dimensions (mm) :	
d :	20
D :	52
B :	15
rmin :	1.1
D ₁ ≈ :	41.9
D ₂ ≈ :	-
d ₁ ≈ :	31.6
d ₂ ≈ :	-
Installation dimension (mm) :	
d _a min :	27
D _a max :	45
r _a max :	1
Basic rated load (n) :	
Dynamic load C _r :	12700
Static load C _{or} :	3300
Calculation coefficient :	
e :	0.29
Y ₁ :	2.17
Y ₂ :	3.35
Y ₀ :	2.27
Fatigue limit load Cur / n :	206
Limit speed ng / min – 1 :	16000
Reference speed nB / min – 1 :	16100

: