



Self-aligning ball bearing


Cylindrical hole or conical hole (open or sealed)-2304-TVH

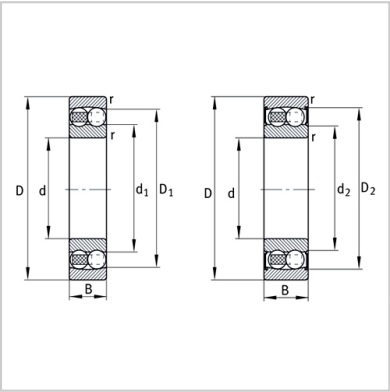

Cylindrical hole, cylindrical hole seal 2RS

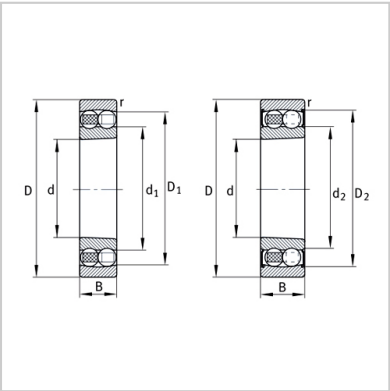

Conical hole, conical hole seal 2RS

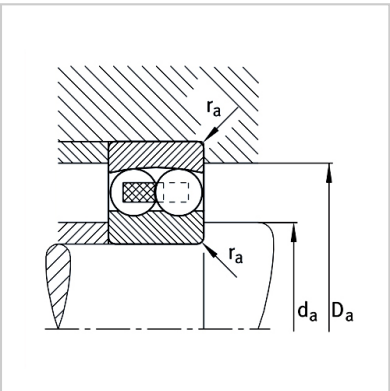

Installation dimension:

model :	2304-TVH
Mass (m ≈ kg) :	0.206
Dimensions (mm) :	
d :	20
D :	52
B :	21
rmin :	1.1
D ₁ ≈ :	41.5
D ₂ ≈ :	-
d ₁ ≈ :	29.1
d ₂ ≈ :	-
Installation dimension (mm) :	
d _a min :	27
D _a max :	45
r _a max :	1
Basic rated load (n) :	
Dynamic load C _r :	17600
Static load C _{or} :	4250
Calculation coefficient :	
e :	0.51
Y ₁ :	1.23
Y ₂ :	1.9
Y ₀ :	1.29
Fatigue limit load Cur / n :	265
Limit speed ng / min – 1 :	16000
Reference speed nB / min – 1 :	16400

: