



Thrust ball bearing


Bidirectional thrust ball bearing- 52202

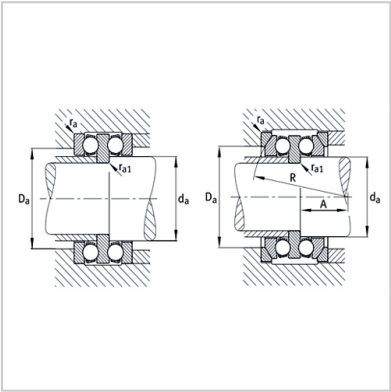

Installation dimension:

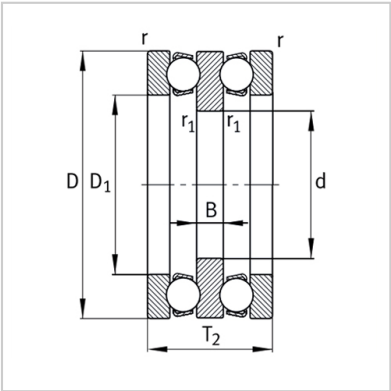

522、523

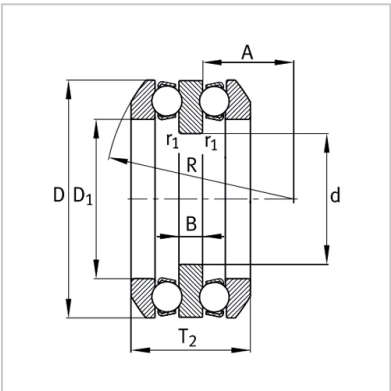

542, 543, centering seat ring

model :

Bearing :	52202
Washer :	-

Mass (m) :

Bearing ≈ kg :	0.076
Washer ≈ kg :	-

Dimensions (mm) :


d :	10
D :	32
T ₂ :	22
D ₁ :	17
B :	5
r min :	0.6
r ₁ min :	0.3
R :	-
A :	-
D ₂ :	-
D ₃ :	-
C :	-
T ₃ :	-

Installation dimension (mm) :

d _a :	15
D _a max :	22
r _a max :	0.6
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	16600
Static load C _{OA} :	25000
Fatigue limit load C _{UA} n :	1100
Minimum load factor	0.003

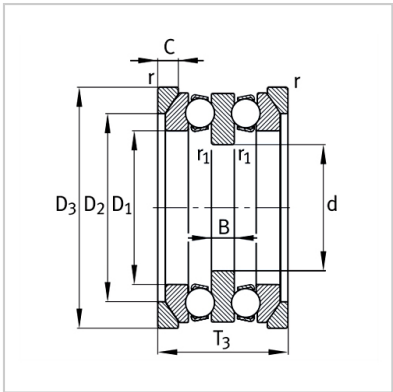

A :	
Limit speed ng min – 1	9000
:	

542, 543, centering seat ring, centering seat washer U2,
u3

: