



Thrust ball bearing


Bidirectional thrust ball bearing-54206U206

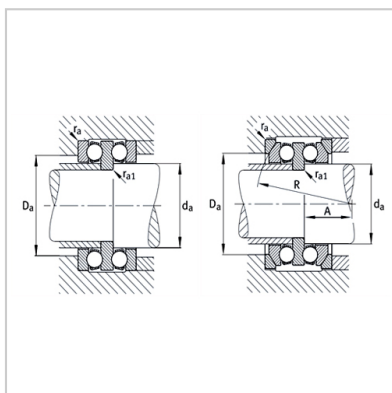

Installation dimension:

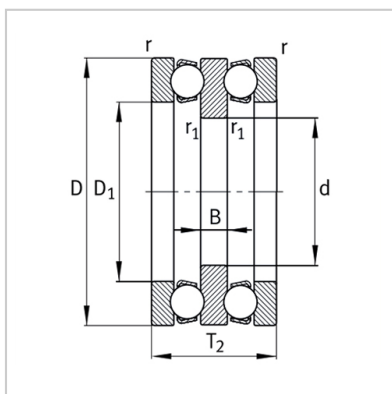

522、523

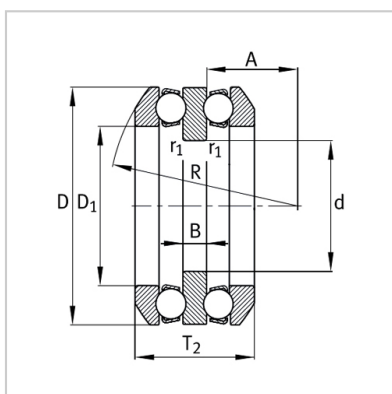

542, 543, centering seat ring

model :

Bearing :	54206
Washer :	U206

Mass (m) :

Bearing ≈ kg :	0.269
Washer ≈ kg :	0.038

Dimensions (mm) :

d :	25
D :	52
T ₂ :	32.6
D ₁ :	32
B :	7
r min :	0.6
r ₁ min :	0.3
R :	45
A :	20
D ₂ :	42
D ₃ :	55
C :	5.5
T ₃ :	37


Installation dimension (mm) :

d _a :	30
D _a max :	42
r _a max :	0.6
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	25000
Static load C _{OA} :	46500
Fatigue limit load CUA n :	2040

Minimum load factor 0.01

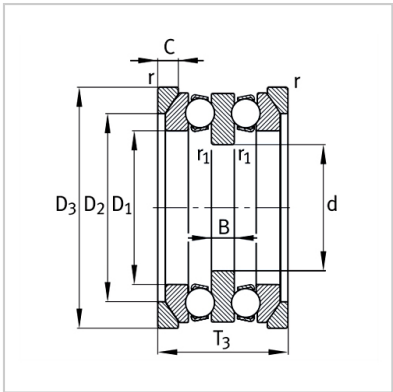

542, 543, centering seat ring, centering seat washer U2,
u3

A :	
Limit speed ng min – 1	6300
:	

: