



Thrust ball bearing


Bidirectional thrust ball bearing-52204

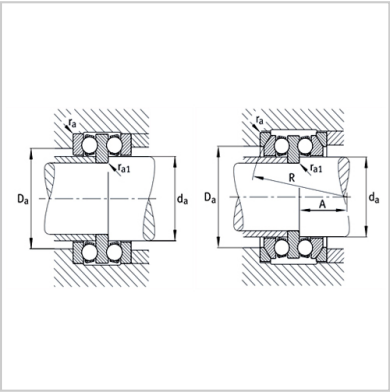

Installation dimension:

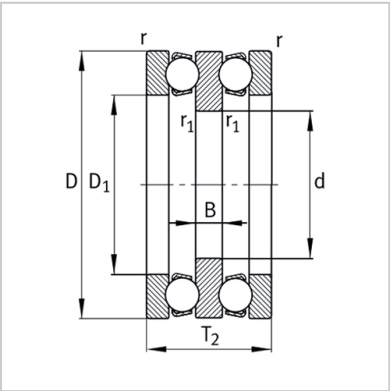

522、 523

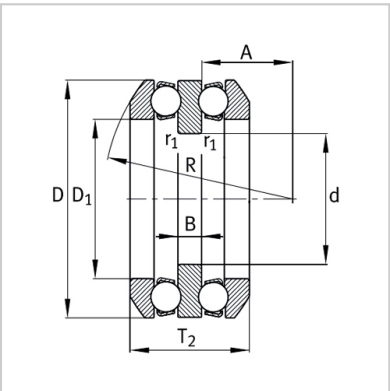

542, 543, centering seat ring

model :

Bearing :	52204
Washer :	-

Mass (m) :

Bearing ≈ kg :	0.145
Washer ≈ kg :	-

Dimensions (mm) :


d :	15
D :	40
T ₂ :	26
D ₁ :	22
B :	6
r min :	0.6
r ₁ min :	0.3
R :	-
A :	-
D ₂ :	-
D ₃ :	-
C :	-
T ₃ :	-

Installation dimension (mm) :

d _a :	20
D _a max :	28
r _a max :	0.6
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	22400
Static load C _{OA} :	37500
Fatigue limit load CUA n :	1660

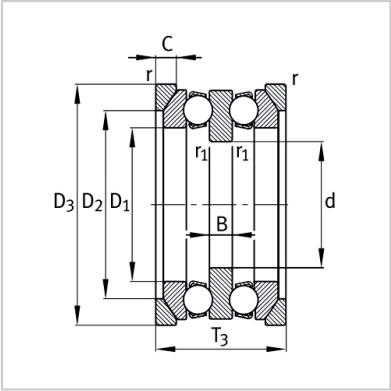

A :	
Limit speed ng min – 1	7500
:	

542, 543, centering seat ring, centering seat washer U2,
u3

: