



Thrust ball bearing


Bidirectional thrust ball bearing-52205

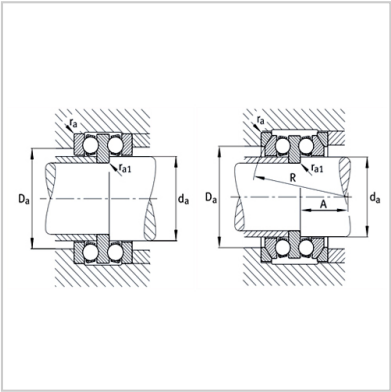

Installation dimension:

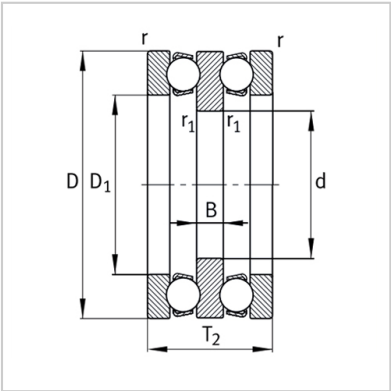

522、 523

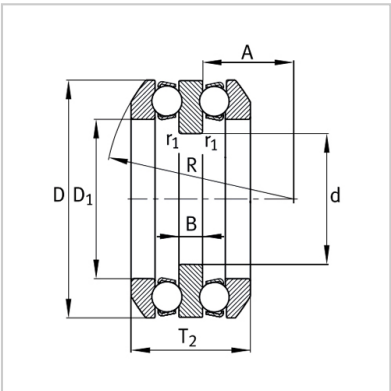

542, 543, centering seat ring

model :

Bearing :	52205
Washer :	-

Mass (m) :

Bearing ≈ kg :	0.215
Washer ≈ kg :	-

Dimensions (mm) :


d :	20
D :	47
T ₂ :	28
D ₁ :	27
B :	7
r min :	0.6
r ₁ min :	0.3
R :	-
A :	-
D ₂ :	-
D ₃ :	-
C :	-
T ₃ :	-

Installation dimension (mm) :

d _a :	25
D _a max :	34
r _a max :	0.6
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	28000
Static load C _{OA} :	50000
Fatigue limit load CUA n :	2220

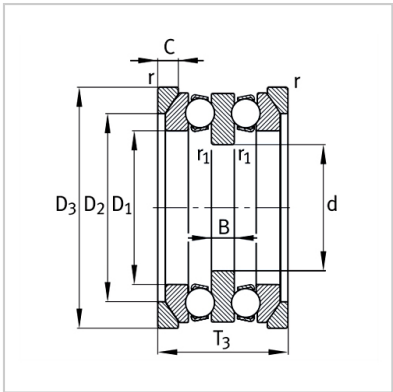

542, 543, centering seat ring, centering seat washer U2,
u3

A :	
Limit speed ng min – 1	6700
:	

: