



Thrust ball bearing


Bidirectional thrust ball bearing-54205

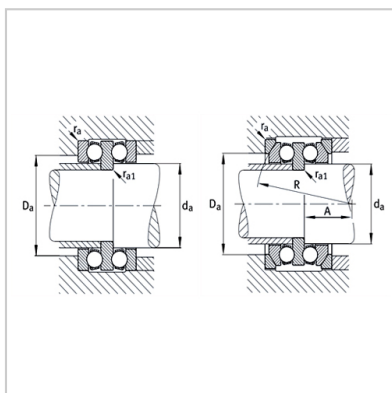

Installation dimension:

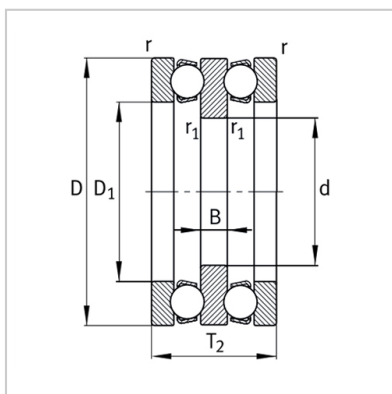

522, 523

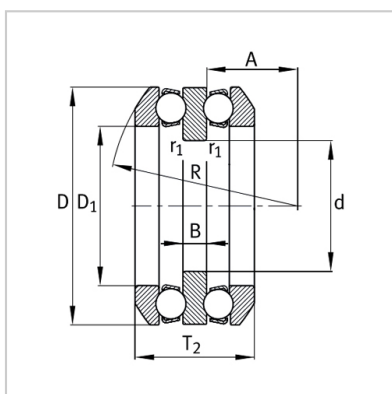

542, 543, centering seat ring

model :

Bearing :	54205
Washer :	-

Mass (m) :

Bearing $\approx$ kg :	0.221
Washer $\approx$ kg :	-

Dimensions (mm) :


d :	20
D :	47
T_2 :	31.4
D_1 :	27
B :	7
r min :	0.6
r_1 min :	0.3
R :	40
A :	16.5
D_2 :	-
D_3 :	-
C :	-
T_3 :	-

Installation dimension (mm) :

d_a :	25
D_a max :	36
r_a max :	0.6
r_{a1} max :	0.3

Basic rated load (n) :

Dynamic load C_a :	28000
Static load C_{OA} :	50000
Fatigue limit load CUA n :	2220

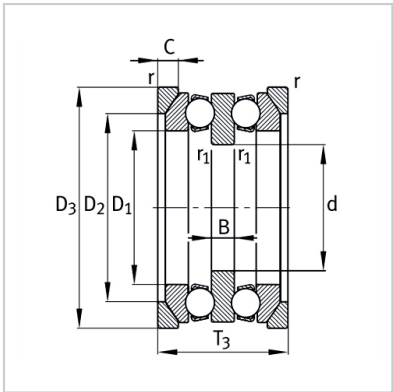

542, 543, centering seat ring, centering seat washer U2,
u3

A :	
Limit speed ng min – 1	6700
:	

: