



Thrust ball bearing


Bidirectional thrust ball bearing-54205U205

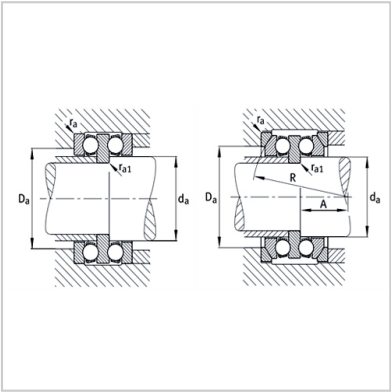

Installation dimension:

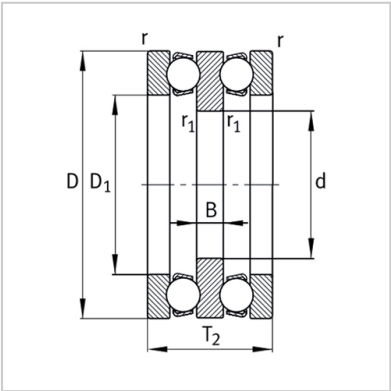

522、523

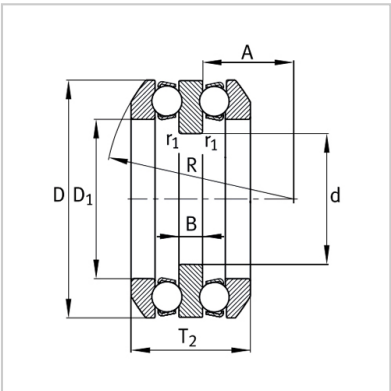

542, 543, centering seat ring

model :

Bearing :	54205
Washer :	U205

Mass (m) :

Bearing ≈ kg :	0.221
Washer ≈ kg :	0.032

Dimensions (mm) :


d :	20
D :	47
T ₂ :	31.4
D ₁ :	27
B :	7
r min :	0.6
r ₁ min :	0.3
R :	40
A :	16.5
D ₂ :	36
D ₃ :	50
C :	5.5
T ₃ :	36

Installation dimension (mm) :

d _a :	25
D _a max :	36
r _a max :	0.6
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	28000
Static load C _{0A} :	50000
Fatigue limit load C _{UA} n :	2220

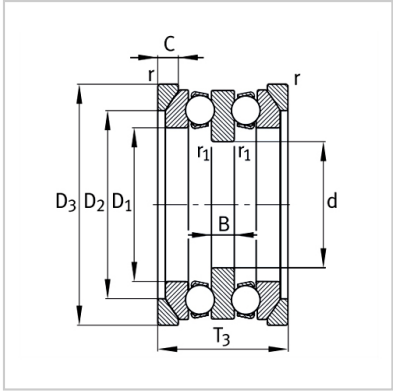

542, 543, centering seat ring, centering seat washer U2,
u3

A :	
Limit speed ng min – 1	6700
:	

: