



Thrust ball bearing


Bidirectional thrust ball bearing-54305U305

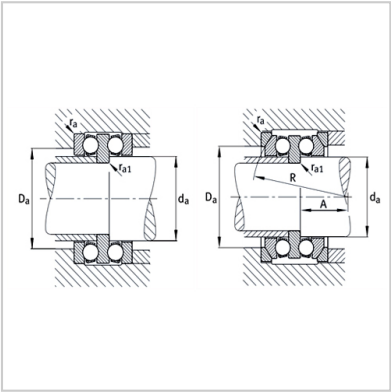

Installation dimension:

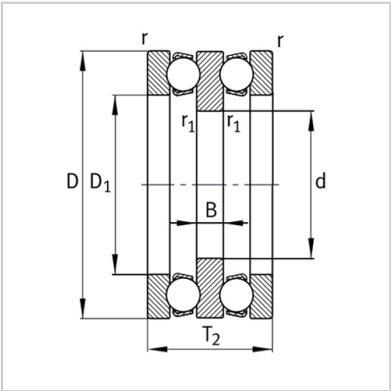

522、523

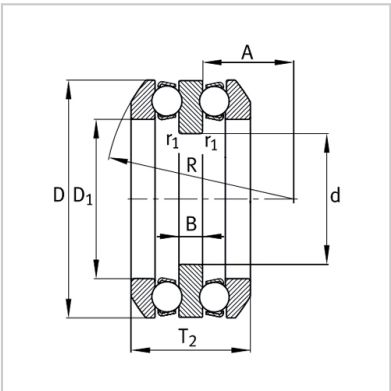

542, 543, centering seat ring

model :

Bearing :	54305
Washer :	U305

Mass (m) :

Bearing ≈ kg :	0.303
Washer ≈ kg :	0.044

Dimensions (mm) :


d :	20
D :	52
T ₂ :	37.6
D ₁ :	27
B :	8
r min :	1
r ₁ min :	0.3
R :	45
A :	18
D ₂ :	38
D ₃ :	55
C :	6
T ₃ :	42

Installation dimension (mm) :

d _a :	25
D _a max :	38
r _a max :	1
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	34500
Static load C _{OA} :	55000
Fatigue limit load C _{UA} n :	2450
Minimum load factor	0.019

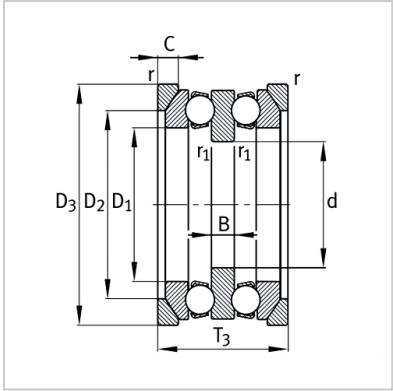

542, 543, centering seat ring, centering seat washer U2,
u3

A :	
Limit speed ng min – 1	5300
:	

: