



Thrust ball bearing


Bidirectional thrust ball bearing-52206

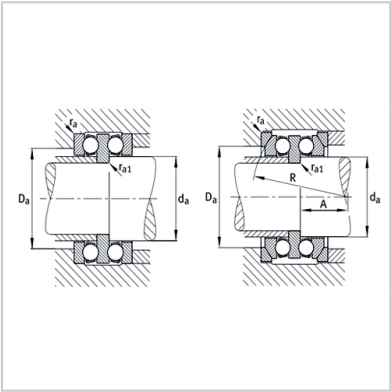

Installation dimension:

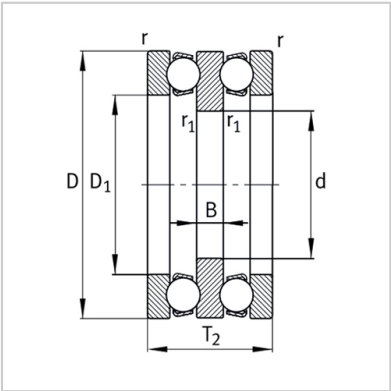

522、523

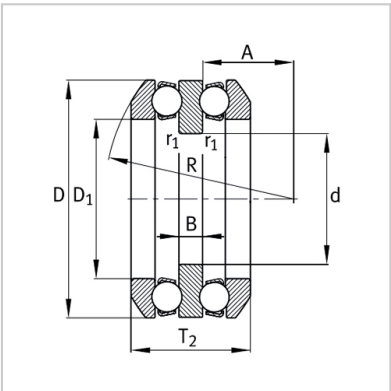

542, 543, centering seat ring

model :

Bearing :	52206
Washer :	-

Mass (m) :

Bearing ≈ kg :	0.236
Washer ≈ kg :	-

Dimensions (mm) :


d :	25
D :	52
T ₂ :	29
D ₁ :	32
B :	7
r min :	0.6
r ₁ min :	0.3
R :	-
A :	-
D ₂ :	-
D ₃ :	-
C :	-
T ₃ :	-

Installation dimension (mm) :

d _a :	30
D _a max :	39
r _a max :	0.6
r _{a1} max :	0.3

Basic rated load (n) :

Dynamic load C _a :	25000
Static load C _{OA} :	46500
Fatigue limit load CUA n :	2040
Minimum load factor	0.01

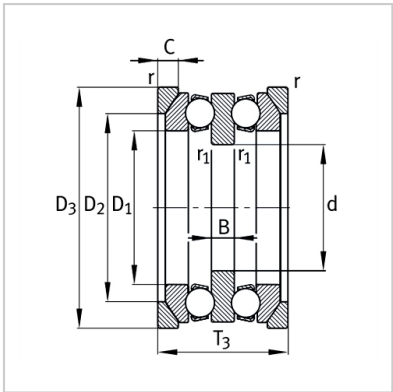

542, 543, centering seat ring, centering seat washer U2,
u3

A :	
Limit speed ng min – 1	6300
:	

: