


Cylindrical roller bearing

Cylindrical roller bearing semi locating bearing-NUP2203-E-TVP2

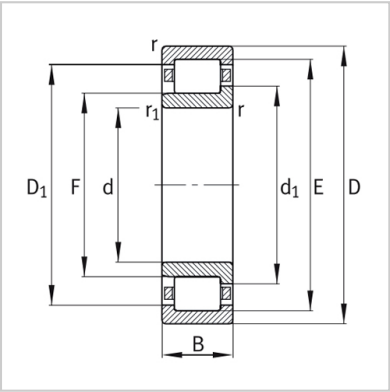

model :


Bearing :	NUP2203-E-TVP2
L-shaped inclined retaining ring :	-

Mass (m) :


Bearing ≈ kg :	0.055
L-shaped inclined retaining ring ≈ kg :	-

Dimensions (mm) :

d :	17
D :	40
B :	16
r min :	0.6
r ₁ min :	0.6
s ¹⁾ :	-
E :	35.1
F :	22.1
D ₁ ≈ :	32.5
d ₁ ≈ :	24.7
B ₁ :	-
B ₂ :	-
B ₃ :	3

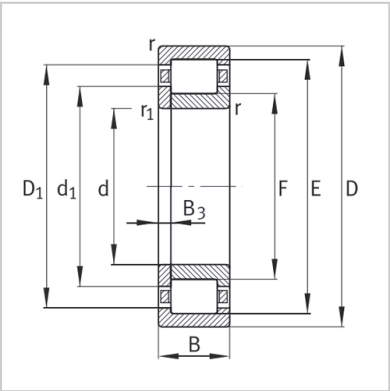

NUP type locating bearing

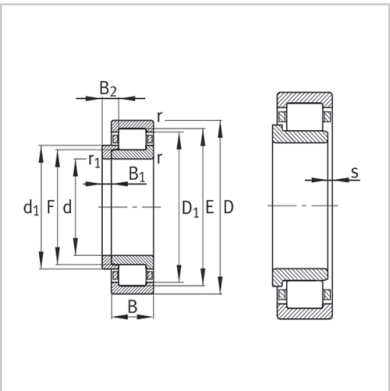


NJ + HJ type positioning bearing, axial displacement "s"
NJ type

Installation dimension (mm) :

d _a min ²⁾ :	21
d _a max :	-
d _c min :	26
D _a max ²⁾ :	36
r _a max :	0.6

Basic rated load (n) :

Dynamic load C _R :	28500
Static load C _{or} :	21900

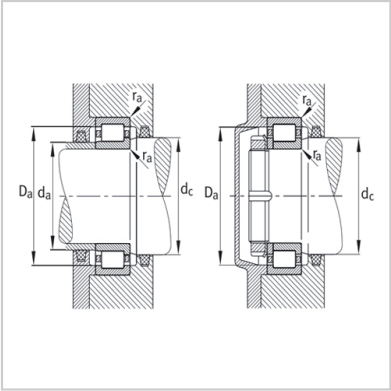

NJ and NUP installation dimensions

:

Fatigue limit load Cur / n :	3500
Limit speed ng / min – 1 :	18000
Reference speed nB / min – 1 :	13300