



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045013-PP

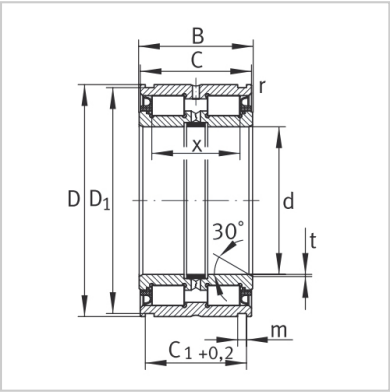

SL0450..PP、SL04..-PP

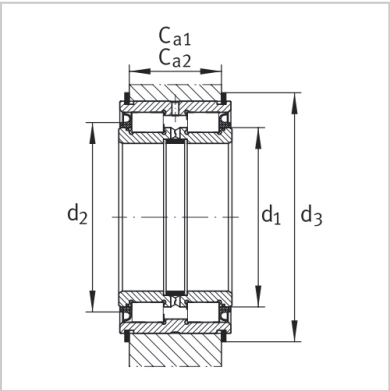

Installation dimension:

model :	SL045013-PP
Mass / M ≈ kg :	1.33

Dimensions (mm) :

d :	65
D :	100
B :	46
C :	45
C ₁ +0.2 :	40.2
D ₁ :	97.4
m :	3.2
r min :	0.6
t :	1
x :	36

Installation dimension (mm) :

C _{a1} ¹⁾ -0.2 :	35
C _{a2} ²⁾ -0.2 :	34
d ₁ :	78.8
d ₃ ¹⁾ :	84
d2 :	109

Basic rated load (n) :

Dynamic load C _R :	130000
Static load C _{or} :	215000
Fatigue limit load cur / n :	29500
Limit speed ng lipid min – 1 :	1600
Snap ring wre :	WRE100
Stop ring according to din471 :	100X3

: