



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045016-PP

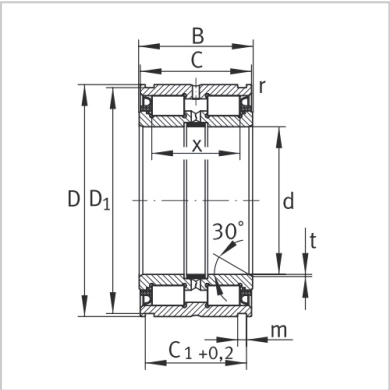

SL0450..PP、SL04..-PP

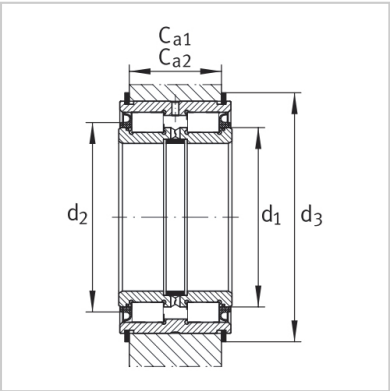

Installation dimension:

model :	SL045016-PP
Mass / M ≈ kg :	2.71
Dimensions (mm) :	
d :	80
D :	125
B :	60
C :	59
C ₁ +0.2 :	54.2
D ₁ :	122.1
m :	4.2
r min :	0.6
t :	1.5
x :	48
Installation dimension (mm) :	
C _{a1} ¹⁾ -0.2 :	49
C _{a2} ²⁾ -0.2 :	46
d ₁ :	97.1
d ₃ ¹⁾ :	105
d2 :	137
Basic rated load (n) :	
Dynamic load C _R :	210000
Static load C _{or} :	340000
Fatigue limit load cur / n :	45000
Limit speed ng lipid min – 1 :	1300
Snap ring wre :	WRE125
Stop ring according to din471 :	125X4

: