



## Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045005-PP

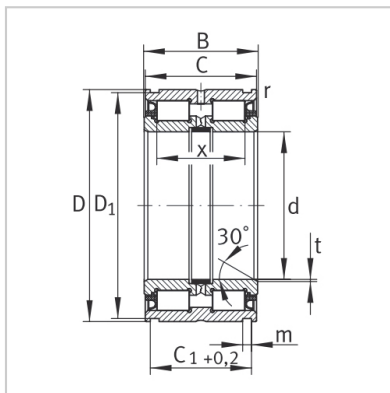

SL0450..PP、SL04..-PP

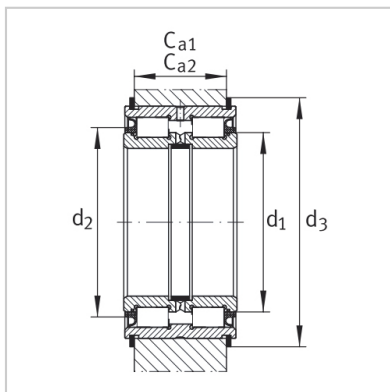

Installation dimension:

|                 |             |
|-----------------|-------------|
| model :         | SL045005-PP |
| Mass / M ≈ kg : | 0.24        |

Dimensions (mm) :

|                       |      |
|-----------------------|------|
| d :                   | 25   |
| D :                   | 47   |
| B :                   | 30   |
| C :                   | 29   |
| C <sub>1</sub> +0.2 : | 24.7 |
| D <sub>1</sub> :      | 45.2 |
| m :                   | 1.8  |
| r min :               | 0.3  |
| t :                   | 0.5  |
| x :                   | 22.5 |

Installation dimension (mm) :

|                                      |       |
|--------------------------------------|-------|
| C <sub>a1</sub> <sup>1)</sup> -0.2 : | 21.5  |
| C <sub>a2</sub> <sup>2)</sup> -0.2 : | 21    |
| d <sub>1</sub> :                     | 35.35 |
| d <sub>3</sub> <sup>1)</sup> :       | 39    |
| d2 :                                 | 52    |

Basic rated load (n) :

|                                 |         |
|---------------------------------|---------|
| Dynamic load C <sub>R</sub> :   | 46000   |
| Static load C <sub>or</sub> :   | 60000   |
| Fatigue limit load cur / n :    | 8100    |
| Limit speed ng lipid min – 1 :  | 3600    |
| Snap ring wre :                 | WRE47   |
| Stop ring according to din471 : | 47X1.75 |

: