



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045006-PP

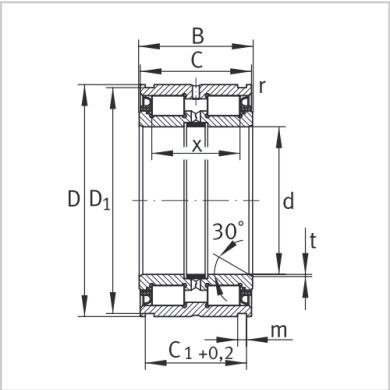

SL0450..PP、SL04..-PP

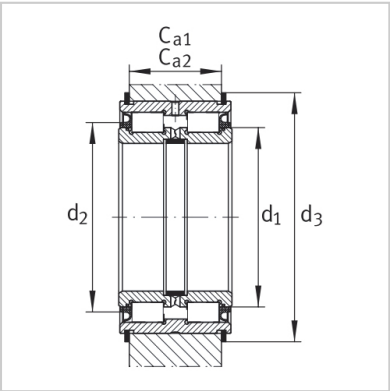

Installation dimension:

model :	SL045006-PP
Mass / M ≈ kg :	0.37
Dimensions (mm) :	
d :	30
D :	55
B :	34
C :	33
C ₁ +0.2 :	28.2
D ₁ :	53
m :	2.1
r min :	0.3
t :	0.5
x :	25.5
Installation dimension (mm) :	
C _{a1} ¹⁾ -0.2 :	25
C _{a2} ²⁾ -0.2 :	24
d ₁ :	40.6
d ₃ ¹⁾ :	44
d2 :	60
Basic rated load (n) :	
Dynamic load C _R :	50000
Static load C _{or} :	67000
Fatigue limit load cur / n :	9500
Limit speed ng lipid min – 1 :	3000
Snap ring wre :	WRE55
Stop ring according to din471 :	55X2

: