



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045007-PP

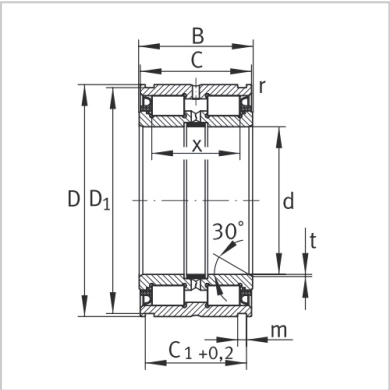

SL0450..PP、SL04..-PP

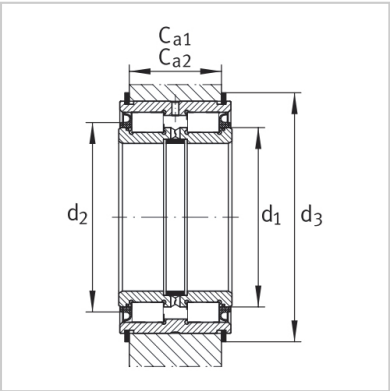

Installation dimension:

model :	SL045007-PP
Mass / M ≈ kg :	0.48

Dimensions (mm) :

d :	35
D :	62
B :	36
C :	35
C ₁ +0.2 :	30.2
D ₁ :	60
m :	2.1
r min :	0.3
t :	0.5
x :	27.5

Installation dimension (mm) :

C _{a1} ¹⁾ -0.2 :	27
C _{a2} ²⁾ -0.2 :	26
d ₁ :	46.1
d ₃ ¹⁾ :	50
d2 :	67

Basic rated load (n) :

Dynamic load C _R :	63000
Static load C _{or} :	88000
Fatigue limit load cur / n :	12400
Limit speed ng lipid min – 1 :	2600
Snap ring wre :	WRE62
Stop ring according to din471 :	62X2

: