



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045008-PP

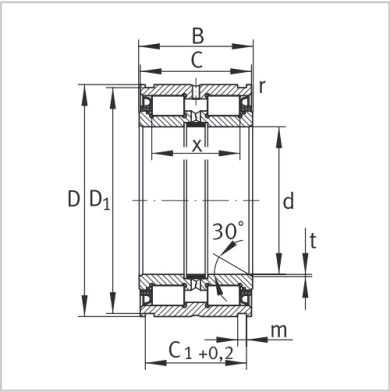

SL0450..PP、SL04..-PP

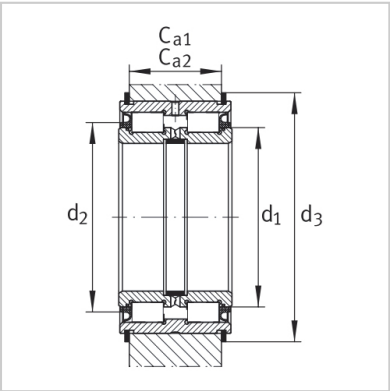

Installation dimension:

model :	SL045008-PP
Mass / M ≈ kg :	0.56
Dimensions (mm) :	
d :	40
D :	68
B :	38
C :	37
C ₁ +0.2 :	32.2
D ₁ :	65.8
m :	2.7
r min :	0.6
t :	0.8
x :	28.5
Installation dimension (mm) :	
C _{a1} ¹⁾ -0.2 :	28
C _{a2} ²⁾ -0.2 :	27
d ₁ :	51.4
d ₃ ¹⁾ :	55
d2 :	75
Basic rated load (n) :	
Dynamic load C _R :	80000
Static load C _{or} :	111000
Fatigue limit load cur / n :	16000
Limit speed ng lipid min – 1 :	2400
Snap ring wre :	WRE68
Stop ring according to din471 :	68X2.5

: