



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045009-PP

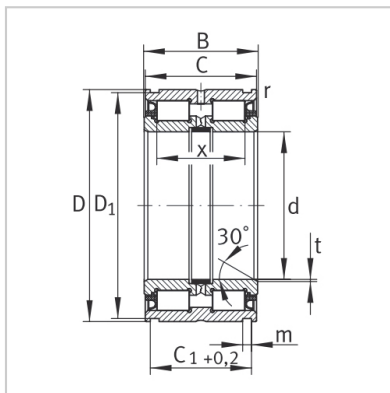

SL0450..PP、SL04..-PP

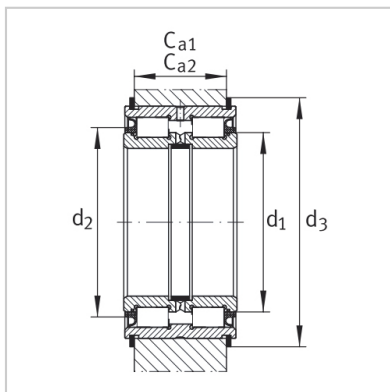

Installation dimension:

model :	SL045009-PP
Mass / M ≈ kg :	0.7

Dimensions (mm) :

d :	45
D :	75
B :	40
C :	39
C ₁ +0.2 :	34.2
D ₁ :	72.8
m :	2.7
r min :	0.6
t :	0.8
x :	30.5

Installation dimension (mm) :

C _{a1} ¹⁾ -0.2 :	30
C _{a2} ²⁾ -0.2 :	29
d ₁ :	57
d ₃ ¹⁾ :	61
d2 :	82

Basic rated load (n) :

Dynamic load C _R :	97000
Static load C _{or} :	139000
Fatigue limit load cur / n :	19900
Limit speed ng lipid min – 1 :	2200
Snap ring wre :	WRE75
Stop ring according to din471 :	75X2.5

: