



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045010-PP

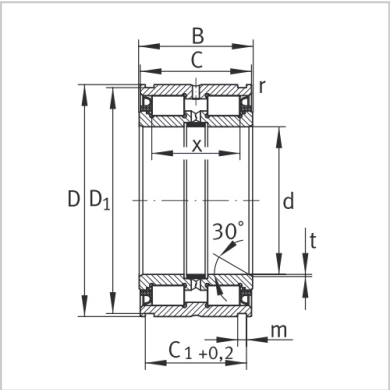

SL0450..PP、SL04..-PP

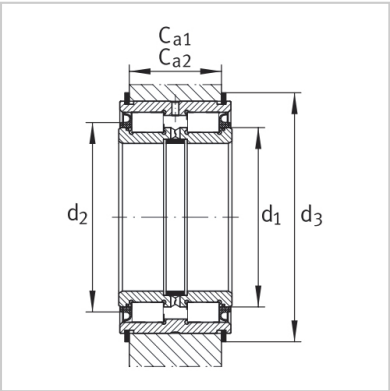

Installation dimension:

model :	SL045010-PP
Mass / M ≈ kg :	0.76

Dimensions (mm) :

d :	50
D :	80
B :	40
C :	39
C ₁ +0.2 :	34.2
D ₁ :	77.8
m :	2.7
r min :	0.6
t :	0.8
x :	30.5

Installation dimension (mm) :

C _{a1} ¹⁾ -0.2 :	30
C _{a2} ²⁾ -0.2 :	29
d ₁ :	61.8
d ₃ ¹⁾ :	66
d2 :	87

Basic rated load (n) :

Dynamic load C _R :	102000
Static load C _{or} :	151000
Fatigue limit load cur / n :	21700
Limit speed ng lipid min – 1 :	2000
Snap ring wre :	WRE80
Stop ring according to din471 :	80X2.5

: