



Cylindrical roller bearing

Cable pulley bearing cylindrical roller bearing with retaining groove-SL045012-PP

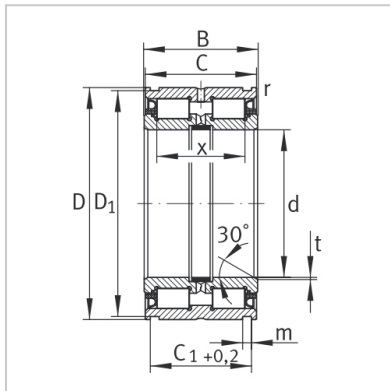

SL0450..PP、SL04..-PP

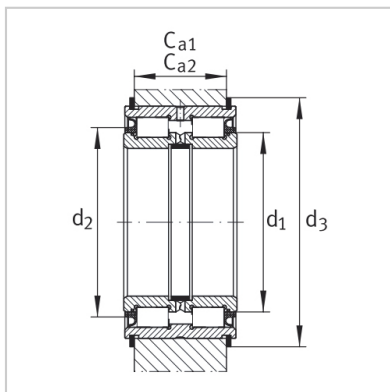

Installation dimension:

model :	SL045012-PP
Mass / M ≈ kg :	1.26

Dimensions (mm) :

d :	60
D :	95
B :	46
C :	45
C ₁ +0.2 :	40.2
D ₁ :	92.4
m :	3.2
r min :	0.6
t :	1
x :	36

Installation dimension (mm) :

C _{a1} ¹⁾ -0.2 :	35
C _{a2} ²⁾ -0.2 :	34
d ₁ :	73.7
d ₃ ¹⁾ :	79
d2 :	104

Basic rated load (n) :

Dynamic load C _R :	125000
Static load C _{or} :	201000
Fatigue limit load cur / n :	27500
Limit speed ng lipid min – 1 :	1700
Snap ring wre :	WRE95
Stop ring according to din471 :	95X3

: